
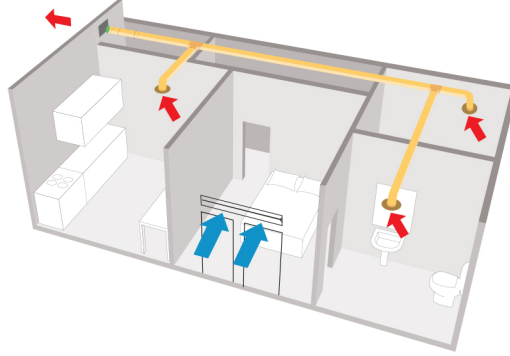


PERFORMANS

Model	Koruma Sınıfı	m ³ /h	l/s	Pa	W	A	dB(A)*
Axc 160	IPX4	365	101	203	29	0,14	31
Axc 200	IPX4	887	246	460	110	0,5	34
Axc 315	IPX4	1439	400	742	260	1,14	43


*Lp(A) 3 metre mesafeden, 230V-50Hz.

ÖLÇÜLER

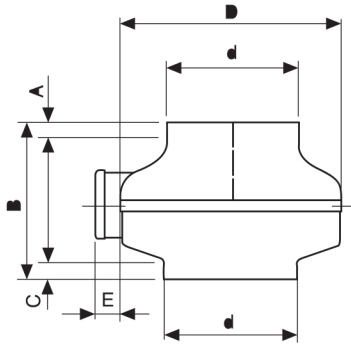

Model	A	B	C	ØD	Ød	E	kg
Axc 160	24	215	24	245	157	38	3
Axc 200	22	230	27	333	198	38	5
Axc 315	30	297	52	404	314	38	8

EĞRİLER

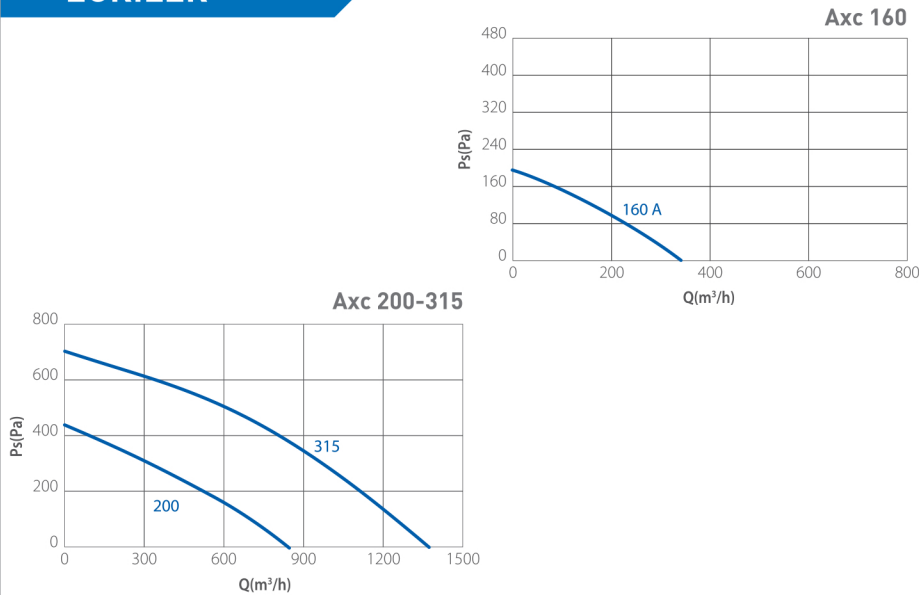

EU 1253/2014 yönetmeliği ve ERP 2009/125/CE direktifine uygundur.

- Kanal içi uygulamalar için yüksek performanslı radyal fanlar
- Merkezi havalandırma ihtiyaçları için kolay ve uygun maliyetli çözüm
- İçi ve dışı epoksi kaplamalı çelik gövde
- Duvar sapıtılma aparatı dahil

UYGULAMA

